








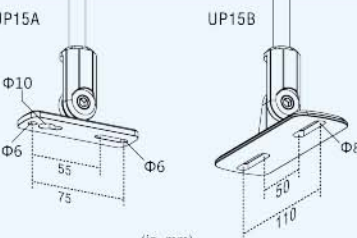




URBAN CLASSIC SPEAKER STANDS

COMPARISON CHART

	SPEAKER WALL MOUNT BRACKET	SPEAKER WALL MOUNT BRACKET	SPEAKER WALL MOUNT BRACKET	SPEAKER WALL MOUNT BRACKET	SPEAKER WALL MOUNT BRACKET	SPEAKER WALL MOUNT BRACKET	SPEAKER WALL MOUNT BRACKET	SPEAKER WALL MOUNT BRACKET	SPEAKER HANGER	SPEAKER HANGER	SPEAKER STAND
	WSS260	WSS140	WSS215	WSS215B	WSS215C	WSS215D	WSS210	WSS205	CSS15 SERIES CSS15A CSS15B	CSS230A	TSS10
											
SPECIFICATIONS											
Metal parts Standard or Optional	Standard: C50L Optional: C50 		C28W 		C28W 		C33 	C28W 	UP15A UP15B 	 Optional: C50 	
Load-bearing	≤≤≤≤ 60 Kg	≤≤≤≤ 40 Kg	≤ 15 Kg	≤ 15 Kg	≤ 15 Kg	≤ 15 Kg	≤ 10 Kg	≤ 5 Kg	≤ 15 Kg	≤ 30 Kg	≤ 10 Kg
Horizontally rotating Angle	-90° ~ +90°	-90° ~ +90°	-90° ~ +90°	-90° ~ +90°	-60° ~ +60°	-60° ~ +60°	-120° ~ +120°	-90° ~ +90°	360°	360°	360°
Vertical adjustment Angle	-15° ~ +37.5°	-7.5° ~ +90°	-90° ~ +90°	-60° ~ +60°	-90° ~ +90°	-60° ~ +60°	0° ~ +63°	-16° ~ +48°	-90° ~ +90°	0° ~ +90°	-
Maximum distance	270 mm	100 mm	90 mm	100 mm	90 mm	100 mm	90 mm	60 mm	UP15A optional length: 110mm / 190mm / 240mm / 395mm UP15B optional length: 120mm / 200mm / 250mm / 405mm	122mm 240mm 295 mm 440mm	The cable can be hide in the tube.
Finish	Black	Black	Black	Black	Black	Black	Black	Black	Black or White	Black	Black
Material	Cold rolled steel	Cold rolled steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Zinc alloy	Zinc alloy	Stainless steel and Metal	Stainless steel and Metal	Aluminum
Accessories	incl	incl	incl	incl	incl	incl	incl	incl	incl	incl	-
Using in	Wall mounting speaker	Wall mounting speaker	Wall mounting speaker	Wall mounting speaker	Wall mounting speaker	Wall mounting speaker	Wall mounting speaker	Wall mounting speaker	Ceiling mounted speaker	Ceiling mounted speaker	stand
Dimensions	130 x 160 x 270 mm(WxHxD)	80 x 150 x 100 mm(WxHxD)	76 x 100 x 90 mm(WxHxD)	130 x 50 x 100 mm(WxHxD)	46 x 130 x 90 mm(WxHxD)	130 x 130 x 100 mm(WxHxD)	85 x 100 x 90 mm(WxHxD)	62 x 52 x 60 mm(WxHxD)	130x65mm (WxD)	130x122x65mm (WxHxD) 130x240x65mm (WxHxD) 130x295x65mm (WxHxD) 130x440x65mm (WxHxD)	Height: 680mm-1130mm
Net weight (1 Piece)	1.76 Kg	0.59 Kg	0.31 Kg	0.41 Kg	0.4 Kg	0.49 Kg	0.485 Kg	0.13 Kg	UP15A N.W.: 110:0.4Kg / 190:0.48Kg / 240 :0.52Kg / 395 :0.66Kg UP15B N.W.: 120:0.5Kg / 200 :0.57Kg / 250 :0.62Kg / 405 :0.75Kg	122mm: 0.56Kg 240mm: 0.67Kg 295mm: 0.71Kg 440mm: 0.84Kg	2.2 Kg
Size of the packing(LxWxH)	295 x 170 x 180 mm	155 x 125 x 50 mm	135 x 135 x 62 mm	135 x 135 x 62 mm	135 x 135 x 62 mm	135 x 135 x 62 mm	185 x 115 x 90 mm	110 x 72 x 70 mm	390x137x65mm	240x135x80mm 240x135x80mm 240x135x80mm 390x135x145mm	580 x 237 x 70 mm
Gross weight(1 Pair)	5.2 Kg	0.65 Kg / 1 Piece	0.8 Kg	0.98 Kg	1.1 Kg	1.2 Kg	1.3 Kg	0.46 Kg	UP15A G.W.:110:1.28Kg / 190 :1.44Kg / 240 :1.53Kg / 395 :1.79Kg UP15B G.W.:120:1.46Kg / 200 :1.62Kg / 250 :1.71Kg / 405 :1.97Kg	1.5 Kg 1.75 Kg 1.83 Kg 2.23 Kg	2.7 Kg